

PHYSICAL DATA

FEATURES & ACCESSORIES

- M1 RF Remote & M3-3A Dimmer (Controller) for single colour dimming application
- The LED Mini 1 uses a Radio Frequency signal at 433.92 MHz and can reach about 40-50 meters
- LED Strips can be easily dimmed with the touch remote
- The 3x3A LED Receiver RF Mini is included with this product
- Comes in a set of the M3-3A Controller and the M1 Remote
- Protection includes: Reverse Polarity, LED Output Short, Overload and Restart after Protection

- It remembers its settings in case of power failure!

OPTIONS & ACCESSORIES

- M3-3A Controller and Remote available separately

MOUNTING

Surface


APPLICATION AREAS

LED Lighting Applications

TECHNICAL DATA

LEDCTMM1

MATERIAL	PLASTIC
TYPE	SINGLE COLOUR DIMMER
OUTPUT POWER	108W@12V 216W@24V
INPUT VOLTAGE	12 - 24V DC
OUTPUT CURRENT (MA)	3000MA
AMPERE (A)	9A (Max 3Ax3CH)
REMOTE WORKING VOLTAGE	3V (Battery CR2032)
CONTROL OUTPUT SIGNAL	RF, PWM-CV
FREQUENCY	433.92 MHz
REMOTE DISTANCE	30m
CONTROL ZONES	1
NUMBER OF CHANNELS	1
FUNCTIONS	PROGRAMMABLE
OPERATING TEMPERATURE	-30°C TO 55°C
WEIGHT (KG) - CONTROLLER	0.47KG
WEIGHT (KG) - REMOTE	0.04KG
DIMENSIONS - CONTROLLER	L:135 x W:30 x H:20mm
DIMENSIONS - REMOTE	L:104 x W:60 x H:90mm

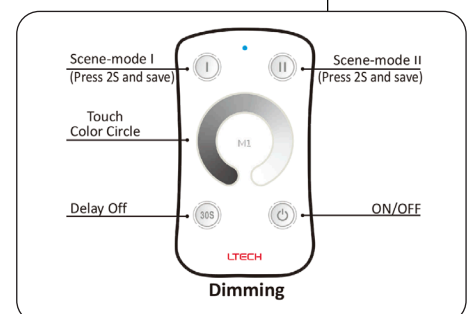

E&OE MAY OCCUR

